

# BASIC plus

## MANUAL TILE CUTTER

BASIC PLUS	30	40	50	60
CUTTING LENGTH	300 mm.	400 mm.	500 mm.	600 mm.
MAX SIZE TILE FOR DIAGONAL CUTS	220 x 220 mm.	280 x 280 mm.	350 x 350 mm.	420 x 420 mm.
CUTTING THICKNESS	4-12 mm	4-12 mm.	4-12 mm.	4-12 mm.
CUTTING WHEEL	Ø 15x6x1,5 mm.	Ø 15x6x1,5 mm.	Ø 15x6x1,5 mm.	Ø 15x6x1,5 mm.
PACKAGE	Art. 2030 Carton box Art. 2031 Plastic case	Art. 2040 Carton box Art. 2041 Plastic case	Art. 2050 Carton box Art. 2051 Plastic case	Art. 2060 Carton box Art. 2061 Plastic case
PACKING DIMENSION	<u>535x170x100 mm.</u> 660x220x110 mm.	<u>635x170x100 mm.</u> 660x220x110 mm.	<u>735x170x100 mm.</u> 660x220x110 mm.	<u>835x170x100 mm.</u> 660x220x110 mm.
PIECES ON PALLET	<u>120</u> 60	<u>90</u> 60	<u>90</u> 60	<u>90</u> 60
PALLET DIMENSION	<u>800x1200x1830 mm.</u> 800x1200x1530 mm.	<u>800x1200x1830 mm.</u> 800x1200x1530 mm.	<u>800x1200x1830 mm.</u> 830x1200x1530 mm.	<u>850x1200x1830 mm.</u> 830x1200x1530 mm.
NET WEIGHT	3,1 Kg.	3,5 Kg.	4,0 Kg.	4,4 Kg.

BASIC	30	40
CUTTING LENGTH	300 mm.	400 mm.
CUTTING THICKNESS	4-12 mm.	4-12 mm.
CUTTING WHEEL	Ø 15x6x1,5 mm.	Ø 15x6x1,5 mm.
PACKAGE	Art. 1030 Carton box Art. 1031 Plastic case	Art. 1040 Carton box Art. 1041 Plastic case
PACKING DIMENSION	<u>535x170x100 mm.</u> 660x220x110 mm.	<u>635x170x100 mm.</u> 660x220x110 mm.
PIECES ON PALLET	<u>120</u> 60	<u>90</u> 60
PALLET DIMENSION	<u>800x1200x1830 mm.</u> 800x1200x1530 mm.	<u>800x1200x1830 mm.</u> 800x1200x1530 mm.
NET WEIGHT	2,9 Kg.	3,4 Kg.



CARTON BOX



PLASTIC CASE

*Designed  
and made  
in Italy*



**BATTIPAV**<sup>TM</sup>  
MACCHINE PER EDILIZIA | MACHINES FOR BUILDING

AUTHORIZED DEALER:



Z. i. 2 - Via Cavatorta, 6/1 | 48010 Cotignola (Ra) | ITALY  
Tel. +39 0545 40004 | Fax +39 0545 41724  
www.battipav.com | sales@battipav.com

January 2011

### APPLICATION

Built to cut single-doublefired ceramic and porcelain stoneware tiles






#### OVAL BARS

Sliding carriage on oval chromium plated bars and base in shaped steel for having high rigidity

### IXEF® BREAKING LOAD (N/mm<sup>2</sup>)

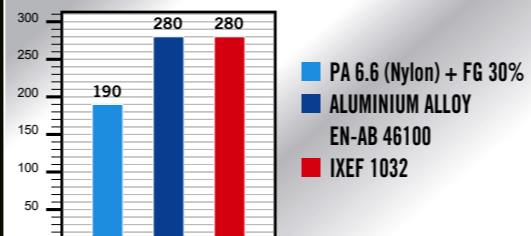

#### IXEF PARTS

5.000.000 of cycles guaranteed without usury.

- **NO LUBRICATION** (The couple of chrome and IXEF is autolubricated).
- **NO MANUTENCION** (Chromed bars are very resistance).



#### CARRIAGE

Sliding carriage in technopolymer of high resistance.

#### Advantages:

- the slide runs on the bars faster avoid clogging;
- no risk of oxid on the slide;
- no oil's use



#### CUTTING

Tile cutting possible in every point due a new system of angulation between the wheel and the breaking foot.



#### BREAKING FOOT

Big size breaking foot for cutting the tile easier. Kit wheel Ø 15 mm.

#### DIAGONAL FENCE

Diagonal fence adjustable from 45° to 90° (only available on **BASIC Plus** model) and graduated scale in cm. and inch.

